

LITHIUM IRON PHOSPHATE BATTERY

ELECTRICAL PERFORMANCE

Nominal Voltage	12.8 V
Nominal Capacity	6 Ah
Capacity @ 1.2A	300 min
Energy	76.8 Wh
Resistance	≤120 mΩ @ 50% SOC
Self-Discharge	<3% / Month
Cells	32650 Cell 3.2V6Ah

CHARGE PERFORMANCE

Recommended Charge Current	2 A
Maximum Charge Current	6 A
Recommended Charge Voltage	14.6 V
BMS Charge Cut-Off Voltage	<15.2V (0.5 ~ 1.5 s)
Reconnect Voltage	>14.6 V
Balancing Voltage	<14.4 V
Maximum Batteries in Series	4

DISCHARGE PERFORMANCE

Continuous Discharge Current	3 A
Max Discharge Current	6 A
BMS Discharge Cut-Off Current	10 A (5 ~15 ms)
Recommended Low Voltage Disconnect	10 V
BMS Discharge Cut-Off Voltage	>8.2 V (50 ~ 150 ms)
Reconnect Voltage	>9.2V
Short Circuit Protection	80 ~ 200 μs

MECHANICAL PERFORMANCE

Dimension (L x W x H)	151 x65 x94mm 5.94 x2.56 x 3.7"
Approx. Weight	0.9 kg
Terminal Type	T2
Terminal Torque	80 ~ 100 in-lbs (9 ~ 11 N-m)
Case Material	ABS
Enclosure Protection	IP65


TEMPERATURE PERFORMANCE

Discharge Temperature	-4 ~ 140 °F (-20 ~ 60 °C)
Charge Temperature	32 ~ 113 °F (0 ~ 45 °C)
Storage Temperature	23 ~ 95 °F (-5 ~ 35 °C)
BMS High Temperature Cut-Off	149 °F (65 °C)
Reconnect Temperature	118 °F (48 °C)

COMPLIANCE

Certifications	CE UN38.3 UL1642 & IEC62133
Shipping Classification	UN 3480, CLASS 9


OUTLINE DIMENSION

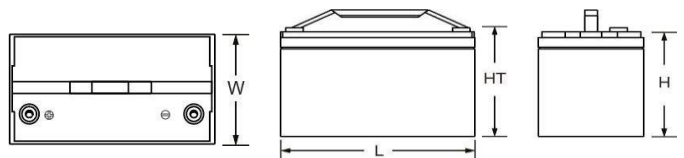



L mm(")	W mm(")	H mm(")	HT mm(")
151 (5.94)	65 (2.56)	94 (3.7)	99 (3.89)

Performance may vary depending on application. All specifications are subject to change without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.


PERFORMANCE CHARACTERISTICS

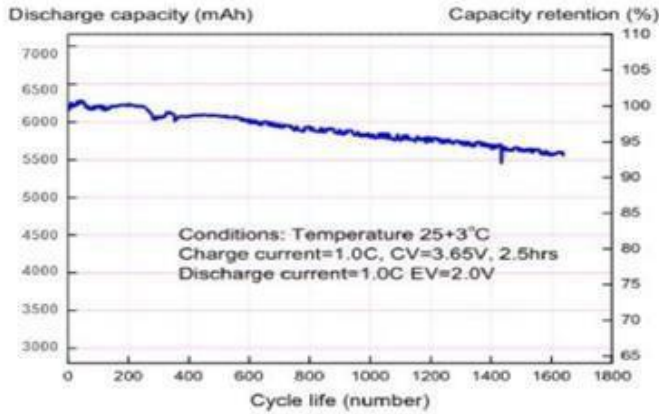

充电曲线图
charge curve

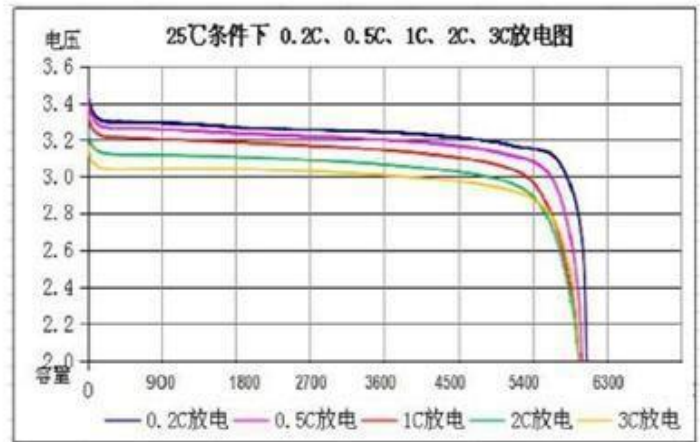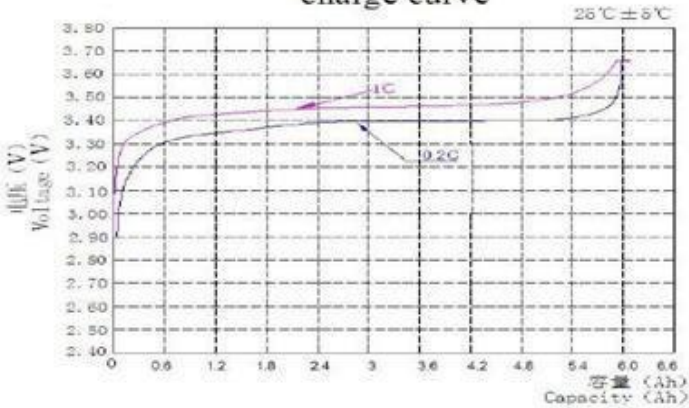

放电曲线图
Diploid discharge curve

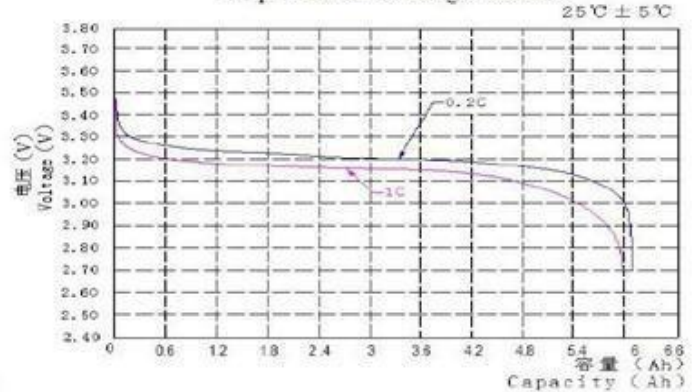

FEATURES & BENEFITS

High cycle life

>2000 cycles @80% DoD for effectively lower total cost of ownership.

Longer service life

Low maintenance batteries with stable chemistry.
Easily monitor state of charge (SoC) of smart models.

Built in circuit protection

Battery Management Systems (BMS) are incorporated against abuse.

Better storage

Up to 6 months thanks to its extremely low self-discharge (LSD) rate and no risk of sulphation.

Quickly recharge

Save time and increase productivity with less down time thanks to superior charge/discharge efficiency.

Extreme heat tolerance

Suitable for use in a wider range of applications where ambient temperature is unusually high: up to +60°C.

Lightweight

Lithium batteries provide more Wh/Kg while also being up to 1/3 the weight of its SLA equivalent.

APPLICATIONS

Lithium Iron Phosphate can be used in most applications that use Lead Acid, GEL or AGM type batteries. Suitable applications include:

- Caravan
- Marine
- Golf Car
- Buggies
- Solar Storage
- Remote Monitoring
- Switching applications and more

CAUTIONS

- Do NOT short circuit, crush or disassemble.
- Do NOT heat or incinerate.
- Do NOT immerse in any liquid.

Store at 50% capacity. Recharge every 3 months. The storage area should be clean, cool, dry and ventilated.